


Spar Buoy

SL-B1060

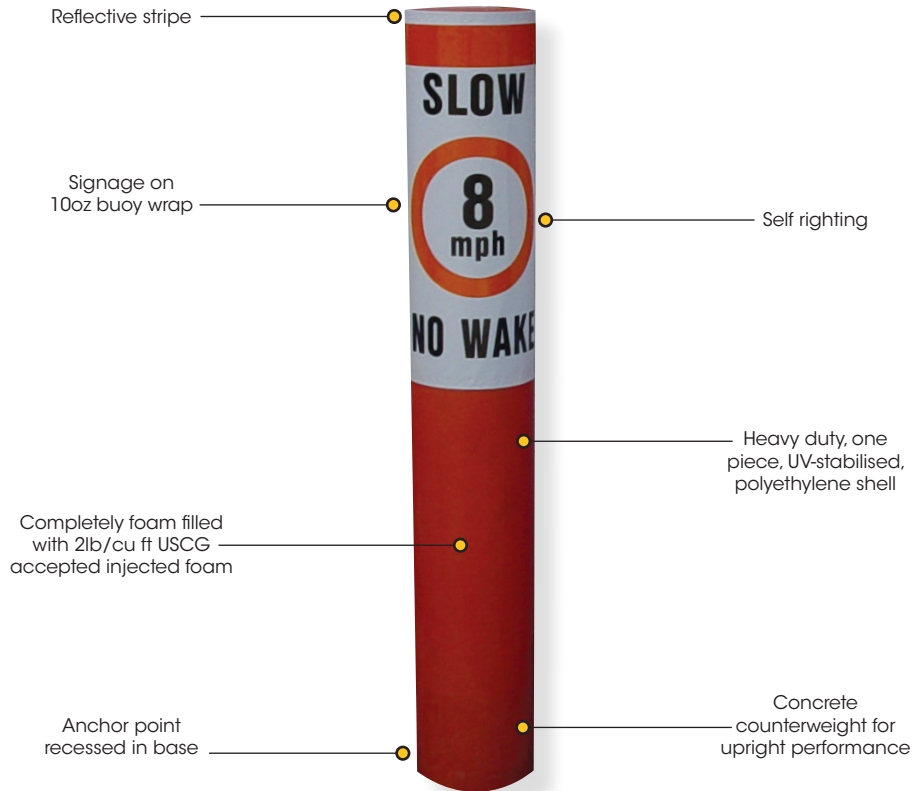

The Sealite Advantage

- Heavy duty, polyethylene shell
- 61" height for a 1 mile visibility
- Recessed anchor point
- Completely foam filled — virtually unsinkable
- Concrete internal counterweight
- Vinyl 'buoy wrap' - easily replaced if damaged
- Reflective band for unmatched night visibility
- Optional SL-15 or SL-60 solar lantern
- Custom signage available
- Low acquisition cost
- Suitable for sub zero temperatures

The SL-B1060 spar buoy is a high-quality, affordable buoy ideal for marking hazards, mooring fields and channels in lakes and ponds.

The SL-B1060 is rotationally-moulded in one piece using UV-stabilised polyethylene making it almost indestructible. The buoy is completely foam filled for added strength and buoyancy and is virtually unsinkable in the unlikely event of damage.

The anchor point is recessed giving the buoy a flat base so it is able to stand upright for easy and convenient storage.

An internal concrete counterweight gives the buoy a lower center of gravity, providing more stability so the buoy is able to stand more upright on station.

The USCG approved reflective band gives unmatched night time visibility. The buoy can be fitted with an SL-15 or SL-60 solar lantern further increasing visibility to 1-3NM+.

Customizable signage is made from a vinyl 'buoy wrap' which is easily replaced if damaged.

Custom colours are available on request.


Available Configurations

Regulatory buoy. Orange/white

Hazard buoy. Orange


Channel markers. Red or green

Special purpose marks. Yellow

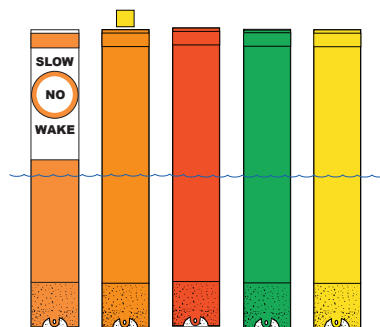



**Environmentally
Friendly &
Recyclable**

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

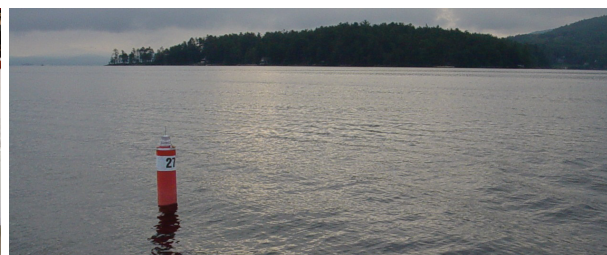

Spar Buoy

SL-B1060

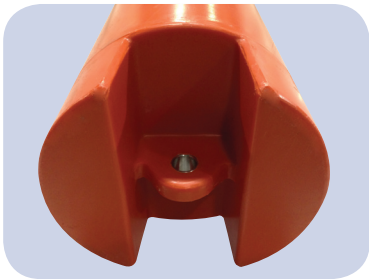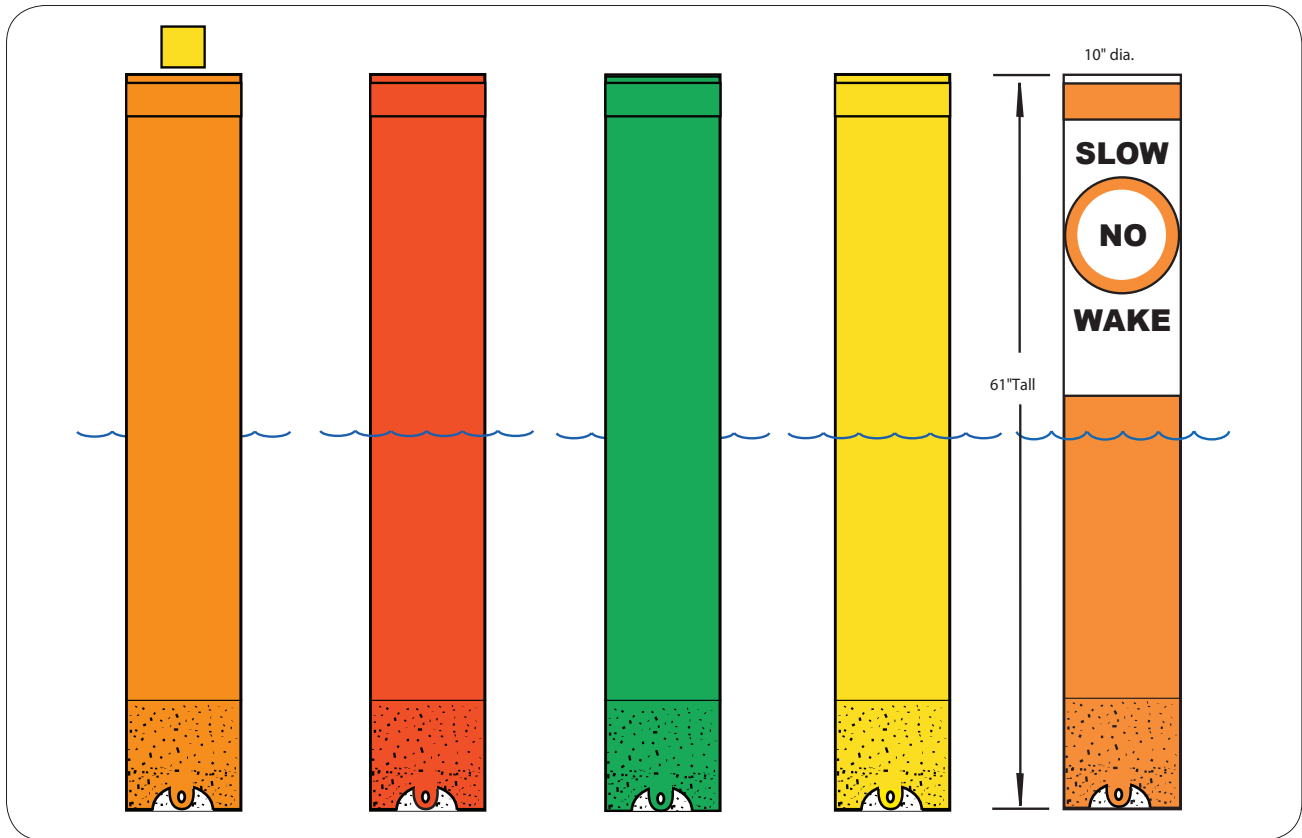

Recessed anchor point means the buoy can stand upright when stored

SPECIFICATIONS * SL-B1060

General Characteristics

Available Colours
Focal Plane Height (mm/inches)
Nominal Freeboard (mm/inches)
Nominal Draught (mm/inches)
Reserve Buoyancy (kgs/lbs)
Maximum Mooring Load (kgs/lbs)
Submergence (kg/cm, lb/inches)
Visual Area (m²/ft²)

Red, Green, White, Yellow as per IALA Recommendations
812 / 32
812 / 32
±736 / ±29
9 / 20
9 / 20
12.5 / 70
0.2 / 2.2

Physical Characteristics

Material

Rotationally-moulded UV-stabilised virgin polyethylene,
316-grade mooring eye

Wall Thickness (mm/inches)

9 / 3/8

Ballast (kg/lbs)

22.6 / 50 internal counter-weight

Filling

Closed-cell polyurethane foam

Height (mm/inches)

1549 / 61

Width (mm/inches)

254 / 10

Mass (kg/lbs)

34 / 75

Product Life Expectancy

Up to 12 years

Certifications

IALA

Surface colours compliant to IALA E-108

Intellectual Property

Trademarks

SEALITE® is a registered trademark of Sealite Pty Ltd

Warranty *

1 year

Lantern Options

Sealite SL-15 or SL-60 lantern

Options Available

• Custom signage



* Specifications subject to change or variation without notice
* Subject to standard terms and conditions